

QVEE Polyurethane Wheel Chock with Side Lip
AUTOMOTIVE | MINING | MARINE #QVWCHD005

www.qvee.com.au

DESCRIPTION



Polyurethane wheel chocks with side lip to suit 4WD mine spec vehicles.

FEATURES

- Rugged polyurethane construction
- Ribbed surface area
- Moulded carrying handle
- Mounting hole for rope, chains and brackets
- Fluorescent orange finish for high visibility use in poor daylight conditions



TECHNICAL SPECIFICATIONS

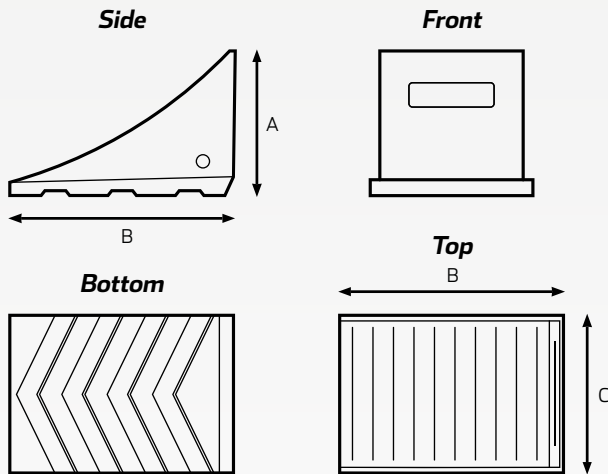

Ribbed surface area



Molded carrying handle




Mounting hole for rope, chains, brackets

DIMENSIONS

A	B	C
• 160mm	• 215mm	• 185mm

Material	• U.V stabilised polyurethane
Colour	• Orange
Bottom	• Solid Ribbed
Weight	• 1.1 kg
Dimensions	• 215mm L x 185mm W x 160mm H
Tyre Size	• Up to 900mm Dia
Max. Weight	• 7 Tonnes / 7,000 kg (per pair of chocks)

SUGGESTED USE



Up to 34" tyre size. An optimal safety wheel chock should approximately be 1/4 in height of the fitted tyre.

- Car
- Ute
- Trailer
- 4WD

*Wheel chock should be placed squarely and centered againsts the tyre with the park brake on.